



APOLLO RECESS

TECHNICAL DATA SHEET

CE

APOLLO RECESS

THE CEILING RECESS HEATER



INNOVATIVE DESIGN

The Tansun Apollo Recess is the part of the Apollo range of heaters, but has been evolved that one step further. The Apollo Recess is designed to fit into ceilings to create warm inviting commercial buildings.

Often wall space can be either limited or required for other functions, and this is where the Tansun Recess Apollo can provide an effective heating solution.



MAINTENANCE FREE

Once installed the Apollo Recess is virtually maintenance free. The heaters can be strategically placed so to avoid wasted heating areas, targeting the heat only where required.

COMFORTABLE HEAT

The Recess Apollo is suitable for a range of applications including hotel reception areas, offices, train stations and factories to name just a few. Additionally they can be used to provide a 'warm welcome' when entering many types of commercial buildings from shops to office reception areas.



RAL

EASY TO INSTALL

CE


APOLLO RECESS

SINGLE

Available in: 1kW-2kW



MOUNTED AT 2.5M FROM GROUND IN A FACE HORIZONTAL POSITION

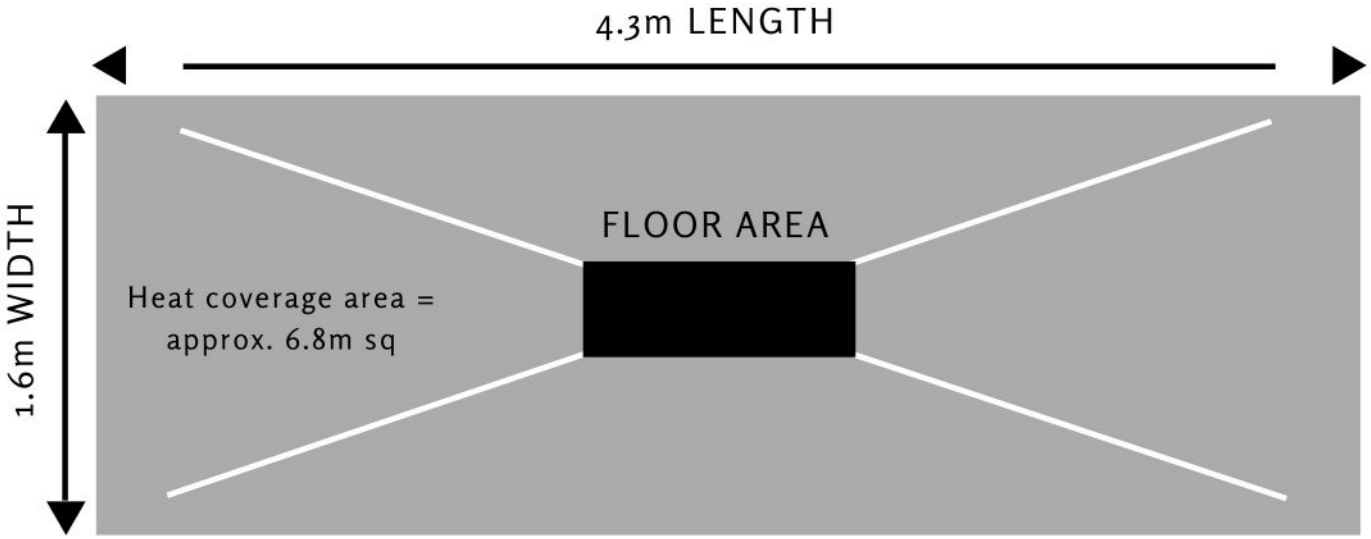

Model (without guard)	Voltage (V)	Lamps x Power (kW)	Total Power (kW)	Minimum height from floor	Minimum distance from ceiling	Minimum distance from side wall	Weight without guard	Body Dimensions (W x H x D) (mm)
A1AR-010IP	230	1 x 1.0	1.0	2.0m	0.15m	1.0m	3kg	420 x 225 x 115
A1AR-015IP	230	1 x 1.5	1.5	2.0m	0.15m	1.0m	3kg	420 x 225 x 115
A1AR-020IP	230	1 x 2.0	2.0	2.0m	0.15m	1.0m	3kg	420 x 225 x 115


APOLLO RECESS

DOUBLE

Available in: 2kW- 4kW



MOUNTED AT 3.0M FROM GROUND IN A FACE HORIZONTAL POSITION

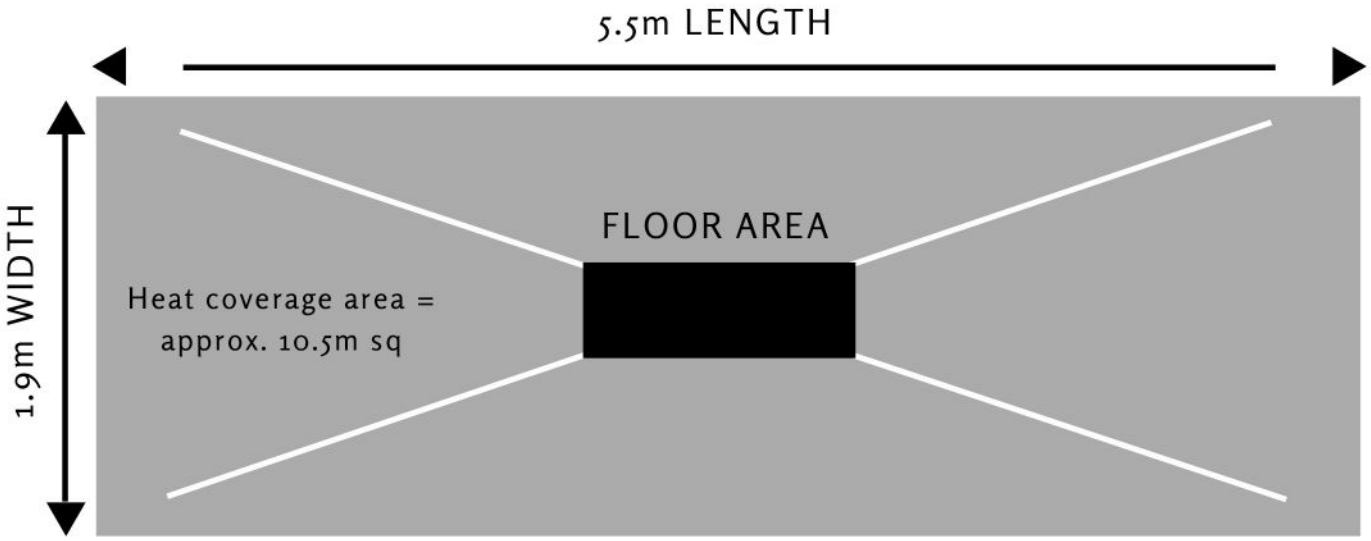

Model (without guard)	Voltage (V)	Lamps x Power (kW)	Total Power (kW)	Minimum height from floor	Minimum distance from ceiling	Minimum distance from side wall	Weight without guard	Body Dimensions (W x H x D) (mm)
A1JR-020IP	230	2 x 1.0	2.0	2.5m	0.15m	1.5m	6kg	855 x 255 x 115
A1JR-030IP	230	2 x 1.5	3.0	2.5m	0.15m	1.5m	6kg	855 x 255 x 115
A1JR-040IP	230	2 x 2.0	4.0	2.5m	0.15m	1.5m	6kg	855 x 255 x 115


APOLLO RECESS

TRIPLE

Available in: 3kW- 6kW



MOUNTED AT 3.5M FROM GROUND IN A FACE HORIZONTAL POSITION

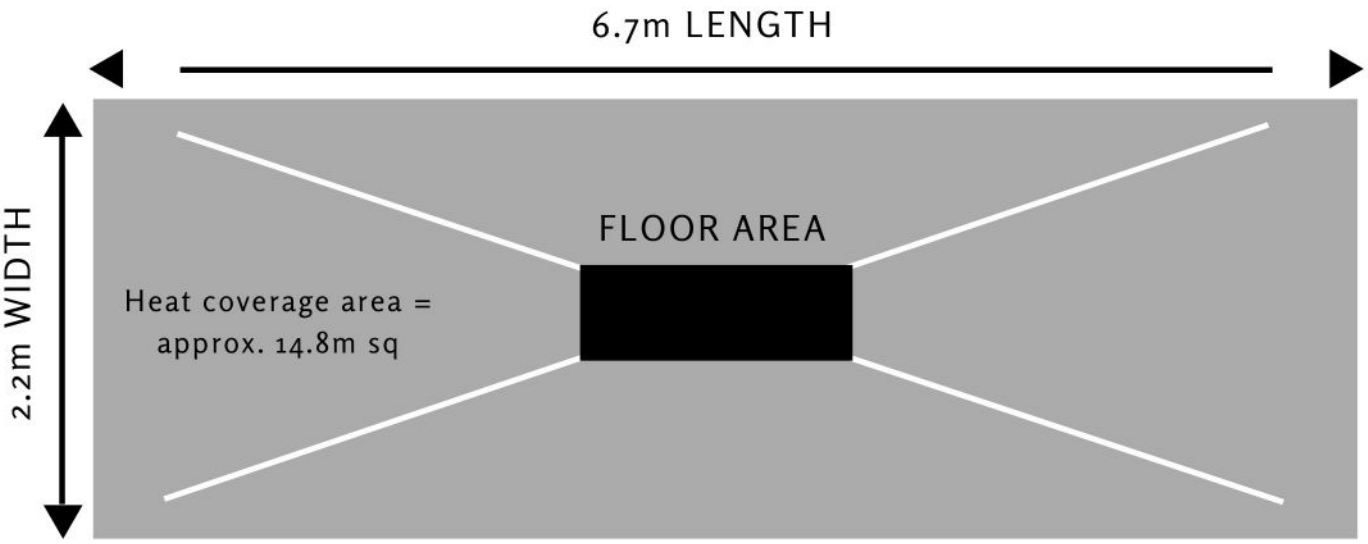

Model (without guard)	Voltage (V)	Lamps x Power (kW)	Total Power (kW)	Minimum height from floor	Minimum distance from ceiling	Minimum distance from side wall	Weight without guard	Body Dimensions (W x H x D) (mm)
A1KR-030IP	230	3 x 1.0	3.0	2.5m	0.15m	1.5m	8kg	1280 x 225 x 115
A1KR-045IP	230	3 x 1.5	4.5	2.5m	0.15m	1.5m	8kg	1280 x 225 x 115
A1KR-060IP	230	3 x 2.0	6.0	3.0m	0.15m	1.5m	8kg	1280 x 225 x 115

APPLICATIONS INCLUDE:

Offices
Reception Areas
Train Stations
Factories
Warehouses
& many more

